


РАЗМЕРЫ В3, мм.

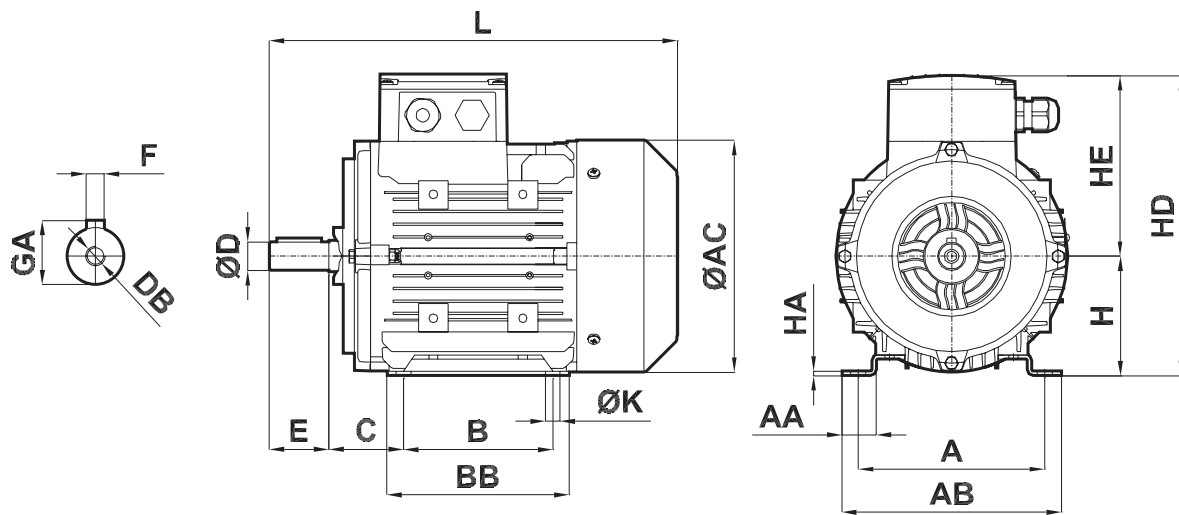

Типоразмер	Кол-во полюсов	D ^[1]	E	L	AC	H ^[2]	HE	HD	F	GA	DB	C	ØK	B	BB	HA	AA	A	AB
063M	2-4-6	11	23	213	119	63	97	160	4	12,5	M4	40	7	80	104	3	18	100	115
071M	2-4-6	14	30	244	137	71	112	183	5	16	M5	45	7	90	110	3	19	112	128
080M	2-4-6	19	40	274	155	80	123	203	6	21,5	M6	50	10	100	122	3	25	125	148
090S	2-4-6	24	50	272	176	90	132	222	8	27	M8	56	10	100	126	4	27	140	167
090S	2-4-6	24	50	325	176	90	132	222	8	27	M8	56	10	100	151	4	27	140	167
090L	2-4-6	24	50	325	176	90	132	222	8	27	M8	56	10	125	151	4	27	140	167
100L	2-4-6	28	60	370,5	193	100	149	249	8	31	M10	63	12	140	170	4	31	160	192
112M	2-4-6	28	60	390	215	112	161	273	8	31	M10	70	12	140	177	4	36	190	217
132S	2-4-6	38	80	495	257	132	181	313	10	41	M12	89	12	140	212	5	34	216	254
132M	2-4-6	38	80	495	257	132	181	313	10	41	M12	89	12	178	212	5	34	216	254
160M	2-4-6	42	110	605	316	160	224	384	12	45	M16	108	14,5	210	323	15	65	254	295
160L	2-4-6	42	110	605	316	160	224	384	12	45	M16	108	14,5	254	323	15	65	254	295
180M	2-4-6	48	110	697	348	180	250	430	14	51,5	M16	121	14,5	241	319	15	50	279	326
180L	2-4-6	48	110	697	348	180	250	430	14	51,5	M16	121	14,5	279	319	15	50	279	326
200L	2-4-6	55	110	740	396	200	287	487	16	59	M20	133	18,5	305	350	18	62,5	318	381
225S	2	55	110	795	438	225	315,5	540,5	16	59	M20	149	18,5	286	370	20	70	356	428
	4-6	60	140	825					18	64									
225M	2	55	110	795	438	225	315,5	540,5	16	59	M20	149	18,5	311	370	20	70	356	428
	4-6	60	140	825					18	64									
250M	2	60	140	896	481	250	335	585	18	64	M20	168	24	349	420	32,5	80	406	490
	4-6	65							69										
280S	2	65	140	1019,5	547	280	402	682	18	69	M20	190	24	368	500	36	121	457	558
	4-6	75							79,5										
280M	2	65	140	1019,5	547	280	402	682	18	69	M20	190	24	419	500	36	121	457	558
	4-6	75							79,5										
315S	2	65	140	1396,5	622	315	499	814	18	69	M20	216	28	406	648	50	137	508	623
	4-6	85							170	22									
315M	2	65	140	1396,5	622	315	499	814	18	69	M20	216	28	457	648	50	137	508	623
	4-6	85							170	22									
315L	2	65	140	1396,5	622	315	499	814	18	69	M20	216	28	508	648	50	137	508	623
	4-6	85							170	22									

[1] Допуск "j6" до 28мм, "к6" от 28 до 48мм, "т6" свыше 48мм TS EN 50347

[2] Допуск "0,5мм" TS EN 50347